




Specialists In Label Identification Systems

**For Product Information Contact:**  
**Card Systems, Inc.**  
**13 Hawks Nest Plaza**  
**St. Charles, MO 63303**  
**636-946-9892**  
**FAX: 636-946-4235**

# Patient ID *XPRESS*<sup>TM</sup> Hardware Specifications



<b>Printer</b>	<b>Printing method</b>	Direct Thermal and/or Thermal Transfer
	<b>Model name</b>	TTP-245, TDP-245
<b>Mechanism</b>	<b>Head density</b>	203 dpi (8 dots/mm)
	<b>Max. Print width</b>	4.25" (108mm)
	<b>Max. Print length</b>	39.3" (999mm)
	<b>Printing Speed</b>	2,3,4,5 ips selectable, 2,3 ips for peeler function
<b>Enclosure</b>	<b>Material</b>	Double-walled Plastic
	<b>Operation panel</b>	One push switch, One indicator LED (two color)
<b>Hardware</b>		Label Gap
	<b>Sensors</b>	Reflective (position adjustable) easy to clean Head Open
	<b>Memory</b>	Flash ROM (1MB), DRAM (2M bytes)
	<b>Interface</b>	RS232 (maximum baud rate 19,200 bps)
		Parallel: SPP / ECP(TBD) USB 1.1
	<b>Cutter (option)</b>	Full, 116 mm width Paper thickness 0.2mm, 100g/m <sup>2</sup> , MCBF 500,000 Paper thickness 0.25mm, 280g/m <sup>2</sup> , MCBF 250,000
	<b>Power</b>	100-240V universal switching power supply (external adapter)

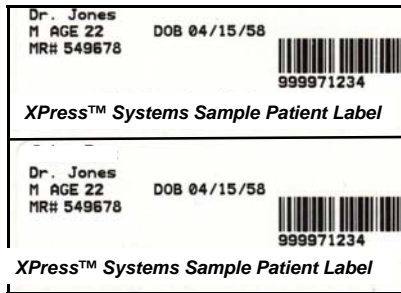

<b>Lynx<sup>TM</sup> D302 Handheld Reader</b>	2D Hand-held reader,
<b>Lynx<sup>TM</sup> D302E Handheld Reader</b>	2D Hand-held reader for high-resolution codes
<b>Power Supply</b>	10 to 30 VDC
<b>Bar Codes</b>	1D Codes-2/5 Interleaved, Code 39, Code 128, Code 93, UPC/EAN
	1D Codes-PDF417, MaxiCode, DataMatrix, (ECC200), QR, AZTEC
<b>Aiming</b>	Visible laser diode @650 nm
<b>Reading Field</b>	28.6 (degrees) (H) x 21.9 (V): D302 model
	21.8 (degrees) (H) x 16.2 (V): D302E Model
<b>Interfaces</b>	RS232, Wedge AT IBM
<b>Dimensions</b>	203 x 117.2 x 68.9 mm
<b>Weight</b>	265 g (without cable)
<b>Operating Temperature</b>	0—40 degrees centigrade
<b>Humidity</b>	0 to 95 degrees non condensing
<b>Drop Resistance</b>	IEC 68-2-32 Test ED